



Advantage-Lok II Panel

Description

Advantage-Lok II is a snap-lock standing seam roofing panel with an integral fastening flange for attachment. The fastening flange eliminates the need for panel clips while still providing superior performance for wind resistance. The Advantage-Lok II panel is a favorite for residential applications but is versatile enough to be used on commercial projects.

Application

Advantage-Lok II panel can be applied to various solid substrate applications such as wood sheathing, wood planking, metal decking, and rigid insulation applied over metal decking.

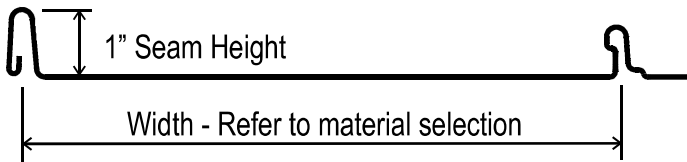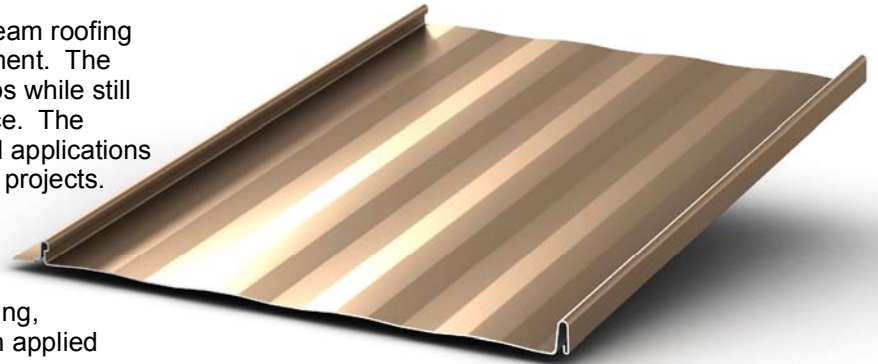

Material

- 26 gauge AZ-50 Galvalume® steel
- 24 gauge AZ-50 Galvalume® steel
- 0.032" Aluminum

Widths

- 16" (standard), 11-5/8", and 18"
- Custom widths available. Please inquire.

Finishes

- Bare Galvalume® (with protective clear acrylic coating)
- PVDF Fluoropolymer (Kynar 500®) finish for 24 gauge and 0.032" aluminum
- SMP (Polyester) finish for 26 gauge

Profile Choices


- Striated (standard), smooth, 2 pencil ribs, or 2 bead ribs (mesa)

Testing





- UL580 Class 90 uplift resistance classified assemblies
- UL790 Fire, Class A rating
- UL2218 Impact resistance, class 4
- Florida Product Approvals: FL#7271.6, FL#7271.7, and FL#18716.1

Warranties

- 25 Year Galvalume® Substrate Warranty
- 30 Year PVDF (Kynar 500®) Warranty
- 40 Year SMP (Polyester) Warranty

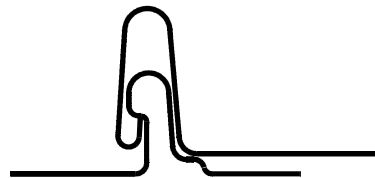

Seam Profile



Optional Surface Patterns

